

Model DRS8000P

PORTABLE TELEMETRY RECORDER



KEY FEATURES

- 1600+ Mbps Sustained Data Rate Record and Playback
- Native IRIG-106 Chapter 10 Recording Format
- Data Export and Data Monitoring while Recording
- Two Removable Diskbanks
 - Capacity up to 2.0TB per Bank Solid-state Disk Drives
- Flexible Recording Modes:
 - Striped or Mirrored
- Accepts one User-installable Interface Board (IFB)
- Timing Interfaces
 - Accepts IRIG-A,
 - IRIG-B, and IRIG-G
 - External 1PPS and 10MHZ Reference
 - Optional NASA 36


GENERAL DESCRIPTION

The DRS8000P is the ultra-compact member of the Industry-leading Digital Recording System (DRS) product family. Optimized for the Telemetry market, the DRS8000P provides exceptional bandwidth and scalability while maintaining strict compliance with the IRIG-106 Chapter 10 standard.

The DRS8000P accepts one user-installable Interface Board (IFB) providing extensive support for a wide range of telemetry applications. Employing a dual-disk bank architecture, the system provides user-selectable, flexible recording modes: striped (high data rate), mirrored (redundancy), or sequential (extended duration).

With a storage capacity of 2.0 to 4.0 TB and an aggregate data rate of 1600+ Mbps, the DRS8000P is uniquely qualified for the most demanding telemetry requirements. The DRS8000P excels in pre-detect analog, post-detect digital PCM, and direct IF recording, as well as Video, Ethernet, Serial, and MIL-STD-1553 recording.

Building on the success of our robust and reliable Digital Recording Systems, Wideband Systems has raised the bar again – Introducing the Next Generation Digital Recording System – the portable DRS8000P.

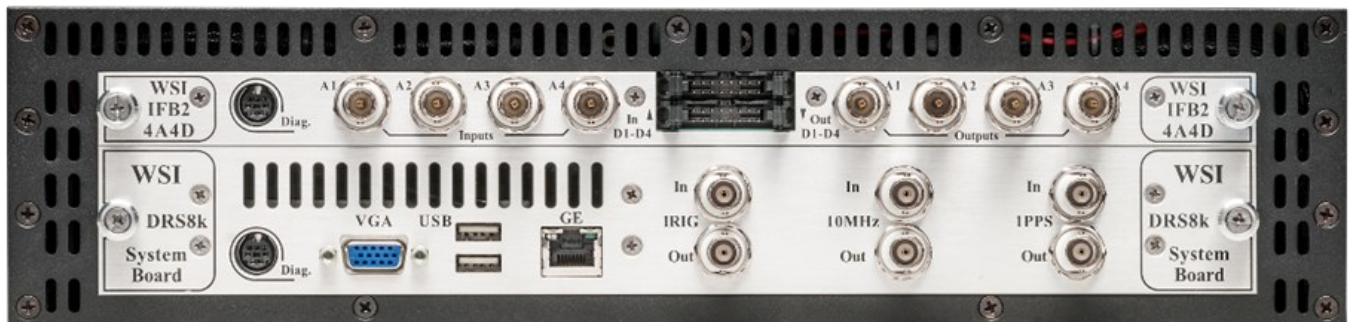

**All system boards now come standard with a Display Port and dual USB 3.0 ports. VGA is no longer offered as a standard video output.*


DATA RECORDING

Model DRS8000P

PORTABLE TELEMETRY RECORDER

TECHNICAL SPECIFICATIONS

Dimensions:	3.5 x 14.5 x 12.5 inches
Weight:	15 pounds (6.8 kg)
Temperature	Operational: 5 to 50 degrees Celsius Non-Operational: -25 to 65 degrees Celsius
Humidity:	5% to 95%, non-condensing
Power (VAC):	90-132 and 180-264 VAC
Power (Hz):	47 to 63 Hz
Power (Watts):	<200 Watts
Record Media:	Two Removable Diskbanks
Disks/Diskbank:	Two 2.5" Disks
Disk Type:	Solid-State Disk
Disk Interface:	SATA
Diskbank Capacity:	1.0 TB (optional to 2.0 TB)
Operator Control:	Local Control via Front Panel 5.0" Touch Screen and/or auxiliary KVM Remote Control via Network attached PC
Data Transfer:	Data Transfer (Import/Export) to local USB and eSATA drives and Network attached devices

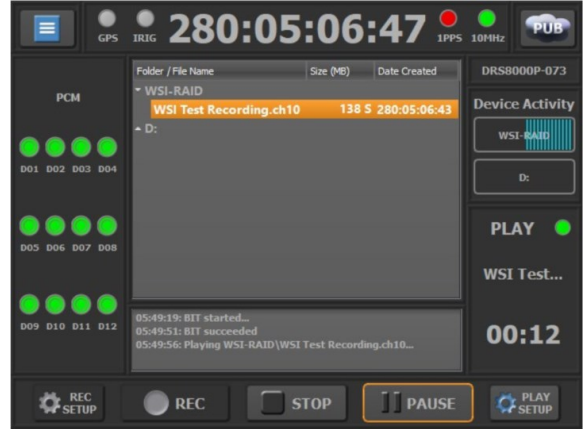

INTERFACE OPTIONS

Standard Interface Boards:

4A4D	4 Analog (up to 80MSPS) 4 Digital PCM (up to 52 Mbps)
12D	12 Digital PCM (up to 40Mbps)
2CHA1	2 High-Speed Analog (200MSPS)
4E4S	4 Ethernet (10/100/1000-Base-T) 4 RS-232 UARTs (up to 1MBaud)
8E	8 Ethernet (10/100/1000-Base-T)
2VHD60	2 SD, 2 HD Video
2IFxx	2 IFs (70, 140, or 370 MHz Center Frequency)
16M1553	16 MIL-STD-1553

General Analog Interface Boards:

Multi-channel, 8-16 bit A-to-D and D-to-A at 50K to 200 MSPS

General Digital Interface Boards:

1, 8, 16, 32 bits in ECL, PECL, LVDS, TTL logic

Other Interface Boards:

Telecom, CDL, Serial FPDP, CameraLink, DCRSi, DIR, and many more ...

Custom Interfaces:

Can be provided quickly and cost-effectively



*All system boards now come standard with a Display Port and dual USB 3.0 ports. VGA is no longer offered as a standard video output.

ORDERING INFORMATION

Please contact our technical sales staff to configure your Digital Recording System. Each system can be tailored to meet your interface, control, and fault tolerance requirements.

Email: sales@wideband-sys.com
Phone: +1.301.588.8840

DRS8000P WARRANTY

Wideband Systems provides:
Industry-Leading Two-Year Limited Warranty
No-Cost Firmware and Software Updates
Lifetime Technical Support

Inquire today to learn more about the DRS8000P operation & control functions.

